


RFTNCAA4JFHF Datasheet

Product Name // TNCA Jack Straight 4 Hole Flange RF Connector

[View Product Page](#)

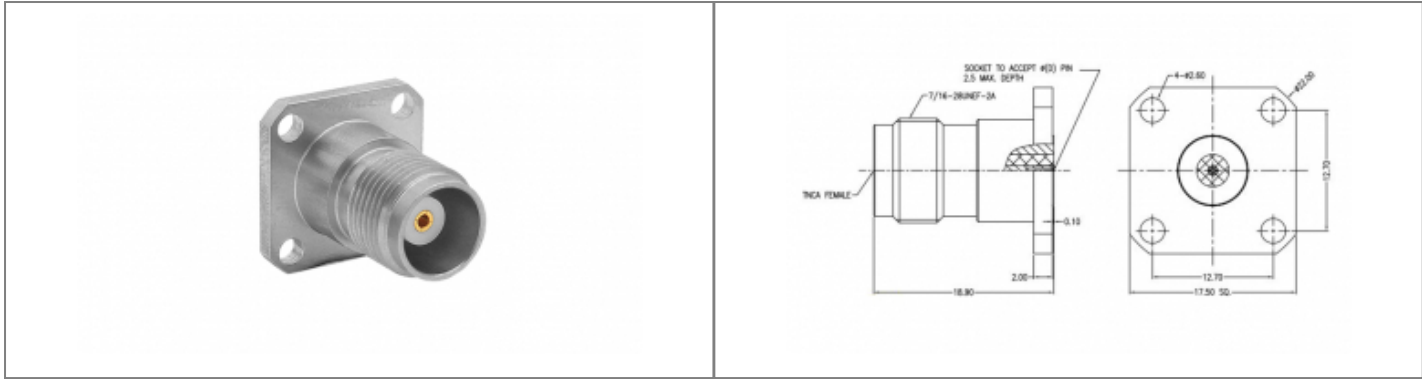

// Product Description:	
<ul style="list-style-type: none"> ⊕ TNCA Jack Straight 4 Hole Flange RF Connector ⊕ Maximum Voltage: 500V ⊕ Temperature range: -65°C to +165°C ⊕ Frequency range: 0GHz - 18GHz ⊕ VSWR: 	<ul style="list-style-type: none"> ⊕ Dielectric withstanding Voltage: >1500V ⊕ Impedance: 50Ohm ⊕ Body Material: Stainless Steel Passivation ⊕ Contact Material: Beryllium Copper

// General Information:	
Product Display Title:	TNCA Series Socket 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	TNCA Series
Body Length:	18.90mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Flange Mount Length:	17.50mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Mount Hole Distance:	12.70mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Socket Diameter:	0.91mm
Thread Size:	7/16 28UNEF 2A
Voltage Max:	500V
Vswr:	<1.30

// Product PDF Links

[TNCA Series Product Datasheet](#)

// Product 3D CAD Model Links

[RFTNCAA4JFHF3D CAD Model](#)