


**Product Name // Vertical Power Entry Module 72.3mm
 Side Fixing Flange Mount C14 Cold Condition Inlet Integral
 Single Fused (PF0011) 6.3mm Tab Termination A0320 Filter
 (3A PS21/A L/C v2) Large Red Indicator**

 [View Product Page](#)

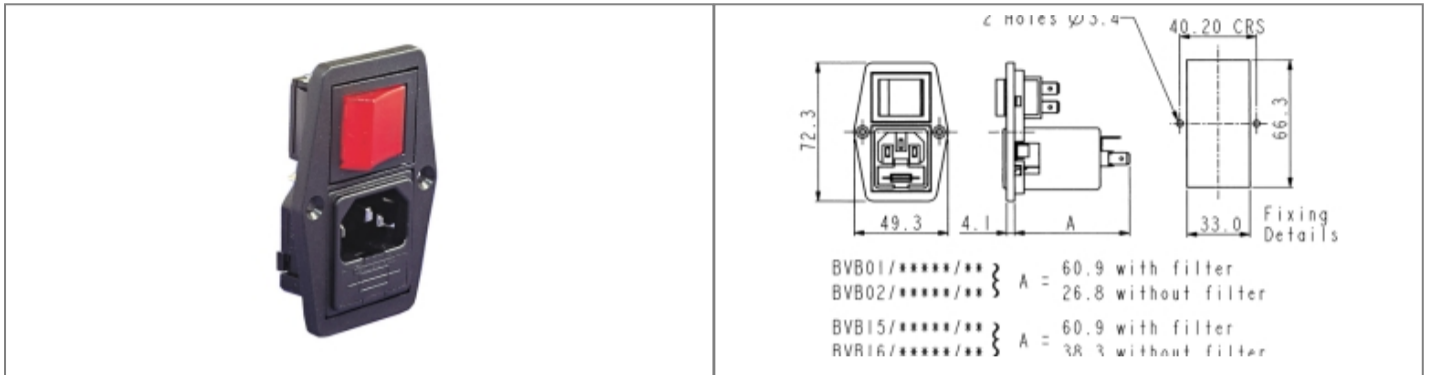

// Product Description:

- Vertical Power Entry Module 67.5mm/81.5mm (part codes prefixed BVA) and 59mm/72.3mm (part codes prefixed BVB)
- Screw fix to panel via choice of fixing flanges, depending on part code:
- Part codes prefixed BVA: Top fixing flanges
- Part codes prefixed BVB: Side fixing flanges
- C14 Cold Condition Inlet with integral fuseholder(s) depending on part code:
- Part codes prefixed BVA01, BVB01, BVA02, BVB02: PF0011 Single Fused Inlet
- Part codes prefixed BVA15, BVB15, BVA16, BVB16: PF0033 Twin Fused Inlet
- Choice of Termination depending on part code:
- Part codes prefixed BVA01, BVB01, BVA15, BVB15: 6.3mm Tab
- Part codes prefixed BVA02, BVB02, BVA16, BVB16: 2.8mm Tab
- Choice of mains filter depending on part code:
- Part codes containing /Z0000 are unfiltered
- Choice of mains filter options (part codes containing codes starting /A)
- Choice of many other options as specified by individual part code, including indicators, illuminated switches, switch markings, etc

// General Information:

| | |
|-----------------------------|---|
| Product Display Title: | Vertical Power Entry Module 67.5mm/81.5mm (part codes prefixed BVA) and 59mm/72.3mm (part codes prefixed BVB) |
| Product Family: | IEC Connectors |
| Product Series: | Power Entry Modules |
| Current Max: | 3A |
| Filter Type: | 3A PS21/A L/C v2 |
| Function: | C14 Inlets |
| Fuseholder Inlet Type: | Integral Single Fused |
| iec Connector Components: | None |
| iec Connector Mates With: | PF0011 |
| iec Filter Options: | A0320 |
| iec Neon Colour: | Red |
| iec Vertical Module Height: | 72.3mm |
| Inlet Type: | C14 Cold Condition Inlet |
| Voltage Max: | 250V |

// Product PDF Links

 [Power Entry Modules product data](#)

// Product 3D CAD Model Links

 [BVB01/A0320/D33D CAD Model](#)