
## PXM7011/02P/ST/1315/SN Datasheet



Product Name // Inline Cable Connector PXM7011 Series 2
Contact Plug Screw Termination (contacts supplied fitted)
13mm-15mm Cable (Light Grey Gland) Metal Body With
Braid Termination



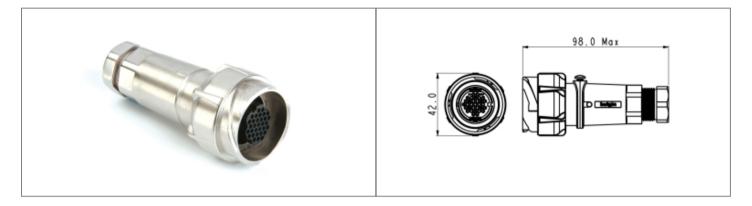

## // Product Description:

- O Inline Cable Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- Quick turn locking ring with less than quarter turn locking and positive feedback
- O Plug or Socket
- Q 2, 3, 6, 10, 32 Contact with leading Earth contact on 3 Contact versions
- Screw, Crimp/Solder terminations available, depending on part code; Screw contacts supplied fitted, Crimp/Solder contacts and fitting tools available separately
- O Choice of body material depending on part code:

- Plastic body (part codes prefixed PXP)
- Metal body (part codes prefixed PXM). Cable Braid Termination option supplied with part codes suffixed /SN or available separately (part code PXM7090)
- Choice of cable acceptance 5mm-15mm diameter depending on part code (see data for details)
- PXP7088 Series Gland Packs available separately to accommodate all sizes
- PXP7082/PXM7082 Sealing Cap available separately to maintain
   IP rating of unmated connectors
- Mate with PXP7010/PXM7010 Series Flex Connectors

## // General Information:

Product Display Title:

Product Family:

Product Series: Approvals:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:
Min Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Min Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Inline Cable Connectors

Circular Power Connectors 7000 Series Buccaneer

UL Series B

Zinc Alloy - Nickel Plated

Metal Body With Braid Termination

Plug Contact

Bayonet Lock 25A

42mm UL94V-0

Inline Cable Connector

IP66

15mm 13mm

10AWG

10AWG

6mm2

+120°C

-40°C

2 Contacts 600V





Click Here To Contact Us