
PXM7011/10P/CR/0507/SN Datasheet bulgin



Product Name // Inline Cable Connector PXM7011 Series 10 Contact Plug Crimp/Solder Termination (contacts available separately) 5mm-7mm Cable (Grey Gland) Metal **Body With Braid Termination**



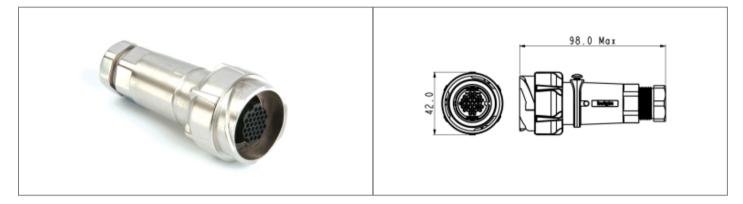

// Product Description:

- 0 Inline Cable Connectors
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 Quick turn locking ring with less than quarter turn locking and positive feedback
- 0 Plug or Socket
- 0 2, 3, 6, 10, 32 Contact with leading Earth contact on 3 Contact
- 0 Screw, Crimp/Solder terminations available, depending on part code; Screw contacts supplied fitted, Crimp/Solder contacts and fitting tools available separately
- 0 Choice of body material depending on part code:

- 0 Plastic body (part codes prefixed PXP)
- Metal body (part codes prefixed PXM). Cable Braid Termination option supplied with part codes suffixed /SN or available separately (part code PXM7090)
- 0 Choice of cable acceptance 5mm-15mm diameter depending on part code (see data for details)
- PXP7088 Series Gland Packs available separately to accomodate all sizes
- O PXP7082/PXM7082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXP7010/PXM7010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series: Approvals:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awa: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Inline Cable Connectors

Circular Power Connectors

7000 Series Buccaneer

UL

Zinc Alloy - Nickel Plated

Metal Body With Braid Termination

Plug Contact

Bayonet Lock 10A

42mm UL94V-0

Inline Cable Connector

IP66 7mm

5mm 20AWG

18AWG 0.75mm2

0.5mm2

+120°C

10 Contacts





Click Here To Contact Us