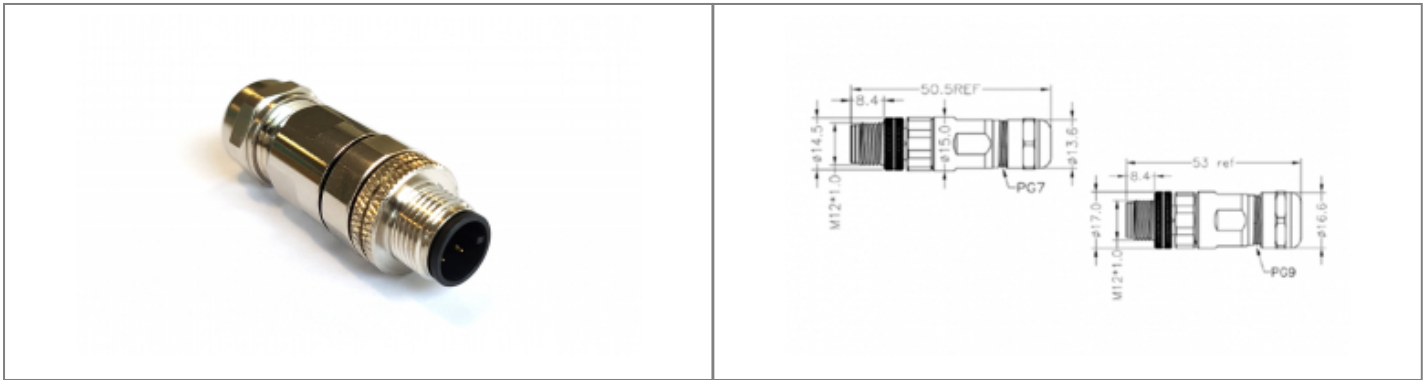


PXMBN12FIM12ASCPG9 Datasheet

Product Name // M12 Series A Code Brass Nickel Plated PG9 Inline Body 12 Contact Pins

[View Product Page](#)


// Product Description:

- ⬢ M12 Series Brass Nickel Plated Inline Body Connectors
- ⬢ Water and dustproof to IP67 when mated with compatible connector
- ⬢ Pin only
- ⬢ 3, 4, 5, 8, 12 Contact (3, 8, 12 Contact are A Code, 4 Contact are choice of A Code A or D Code, 5 Contact are choice of A Code or B Code)
- ⬢ Solder Terminals
- ⬢ Choice of gland nut sizes, depending on part code
- ⬢ Choice of Sealing Caps available separately to maintain IP rating of unmated connectors
- ⬢ Mate with M12 Series Flex Body and Panel Mount Connectors

// General Information:

Product Display Title:	M12 Series Brass Nickel Plated Inline Body Connectors
Product Family:	Circular Automation Connectors
Product Series:	M12 Series
Approvals:	CSA, UL
Body Material:	Brass - Nickel Plated
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	1.5A
Diameter Over Coupling Ring Mm:	20mm
Function:	Inline Cable Connector Body
Ip Rating:	IP67
M12 Series Mounting Nut:	PG9
Max Operating Temperature:	+80°C
Min Operating Temperature:	-25°C
Number Of Contacts:	12 Contacts
Pin Layout Code:	A Code
Rohs Compliant:	Yes
Thread Size:	M12 x 1
Voltage Max:	30V

// Product PDF Links

[M12 Series automation connectors...](#)

// Product 3D CAD Model Links

[PXMBN12FIM12ASCPG93D CAD Model](#)