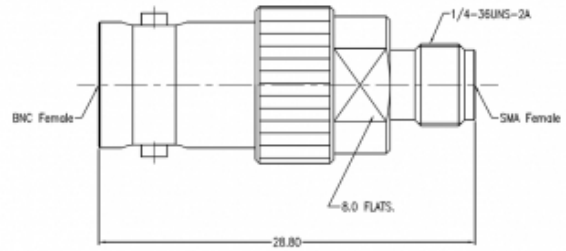


# RFAABNCJSM AJ Datasheet

## Product Name // BNC Jack to SMA Jack RF Adapter

[View Product Page](#)


### // Product Description:

- ⊕ BNC Jack to SMA Jack RF Adapter
- ⊕ Maximum Voltage: 335V
- ⊕ Temperature range: -65°C to +165°C
- ⊕ Frequency range: 0GHz - 8GHz
- ⊕ VSWR:
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

### // General Information:

Product Display Title:	RF Adapter Series BNC Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	28.80mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female Bayonet to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	8GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.15

#### // Product PDF Links

[RF Adapter Series Product...](#)

#### // Product 3D CAD Model Links

[RFAABNCJSM AJ3D CAD Model](#)